

Product Name	GAOTek Firewall Mini PC Server Chassis
Product SKU	GAOTek-CAA-116
Product URL	https://gaotek.com/product/gaotek- firewall-mini-pc-server-chassis/

Contact us: <a href="mailto:sales@gaotek.com">sales@gaotek.com</a>



## **Contents**

PRODUCT FEATURESProperties Production of the Properties Product of the Pro	3
PRODUCT SPECIFICATIONProperties of the control of the contro	3
PRODUCT SIZE	5
ORDERING INFORMATION	



## PRODUCT FEATURES:

- With AD610C6L, support LGA1700 Intel 12th and 13th i3-i5-i7-i9/Pentium/Celeron CPUs
- 2\*DDR4 SO-DIMM 260 Socket memory slots support up to 64G.
- 6 Intel 2.5G NIC chips, ETH1 and ETH2, ETH3 and ETH4 support two sets of Bypass function, 4 x SFP 10G (Intel XL710-BM2)
- 2USB, 1COM, 4SATA, 3 M.2 (SSD, WIFI, 4G&5G), 1CF
- Dimensions 525mm x 486mm x 89mm






## PRODUCT SPECIFICATION:

Materials & Finishes	Horse Steel, Exterior Surface Sandblasted Black			
Motherboard	AD610C6L			
Processor	Support LGA1700 Intel 12th And 13th I3-I5-I7-I9/Pentium/Celeron CPUs			
Storage	1 X M.2 M-Key 2280, NVME PCLE 3.0 X4 Protocol, 4 X SATA3.0 X4 Protocol, NVME			
	PCLE 3.0 X4 Protocol			
	4 X SATA3.0 Ports (SATA4 And CF Card Are Optional), 4 X 3.5-Inch (Compatible With			
	2.5-Inch Hard Drives) Reserved			
Display	1 X HDMI Port			
Front Panel Interface	1 X Rj45 Console, 2 X Usb3.2, 6 X Lan (Eth1-2, Eth3-4 Support Bypass); 4 X Sfp + 10g			
	(Intel Xl710-Bm2), Reserved PCLE X8 Interface Slot			



	1 X POWER LED, 1 X HDD LED, 1 X RESET Switch	
Rear Panel Interfaces	2 X 6025 System Fans (Two By Default), 1 X Power Switch, 1 X HDMI Connector, 2 X	
Real Faller Interfaces	Antennas (None By Default), 1 X VGA (None By Default)	
	Tpm2.0 Optional, None By Default	
Internal Motherboard	1 X M.2 E-Key(PCLE/USB2.0 Protocol, Support WIFI/BT Module)	
Expansion	1 X M.2 B-Key(USB2.0/USB3.0 Protocol, Support 4G/5G Module); 1 X Micro SIM Card	
	Slot	
	1 X CF Or SATA4 Option, Default SATA4	
Power Supply	1u Atx 24+8 Pin Power Supply, 300w Or Above	
	Operating Temperature: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$ ; Operating Humidity: $5\% \sim 90\%$ .	
Operating	Storage Temperature: -40°C ~ +85°C; Storage Humidity: 5% ~ 90	
Environment		
Operating System	Windows 10, Windows 11, Linux, Etc.	
Support		
Dimension	D525mm X W486mm X H89mm ±2.0 mm (With Lugs)	
Weight	Total Weight About 9Kg	



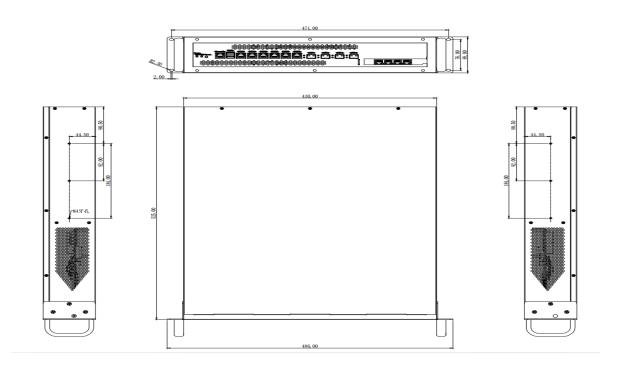

## **ORDERING INFORMATION:**

AVAILABLE WITH	OPTIONAL	DESCRIPTION OF OPTIONS
MOTHERBOARD	ITEMS	
AD610C6L	Chipset	H610/H670/Q670 optional
	CPU	Core 12 <sup>th</sup> , 13 <sup>th</sup> and Pentium, Celeron optional
SK110C6L	Chipset	H110/C236 optional
	CPU	Core 6 <sup>th</sup> , 7 <sup>th</sup> and Pentium, Celeron optional